

SLIMKEY2 GMLAN REV. 1.15

INSTALLATION

The module in object is designed to provide positive ignition output detected from the GMLAN line of the vehicle. The output has a maximum output current of 1.5 A. The second output supply a max current of 100 mA and on default is set the speed pulse output.

The recognition of GMLAN protocol is self-selection as for Unican, and UNICO DUAL. The unique feature of SLIMKEY2 GMLAN module it is that if necessary you can change both outputs function.

In fact doing a simple operation we can change the output as: speedpulse output, lights, reverse parking sensors recovery, reverse output under 10km / h.


For support, please contact: **0141- 947676**.

Cable	
RED	TO A POSITIVE 12 V
BLACK	TO GND
PINK	12 VDC IGNITION OUTPUT (DEFAULT)
ORANGE	SECOND EXIT (NO SPEED PULSE)
GREY	SPEED PULSE
GREEN	CAN H

FUNCTION SELECTION PROCEDURE

If it's necessary to set the outputs in a different way respect the default setting it's needed to connect the unit in order to set the car GMLAN protocol then make the operation below de-

1. press and keep pressed the button of the unit till the LED green switch off, when the LED blinks RED once, please release the button.



2. now released the button the LED of the module will blink Yellow followed by a Green blink and one pause. This visualizing means that it is possible to change the first output (PINK) as described in the TABLE attached.

Now each time we press the button of the module the Green flashes of the LED will increase so verify the position number of the desired function listed in the TABLE attached.

The second output is managed in the same way (GREY wire for speed pulse ORANGE for all the others)


To go to the programming of the second output once entered the first programming press and keep pressed the button of the module till the LED switch off, then release the button, the module LED will blink twice Yellow followed by one Green blink and one pause.

Now each time we press the button of the module the Green flashes of the LED will increase so verify the position number of the desired function listed in the TABLE attached.

**THIS PRODUCT IS GUARANTEED FOR 2 YEARS FOR ANY MANUFACTURING DEFECTS.
THE FISCAL DOCUMENT SERVES AS THE GUARANTEE VALIDITY**


The information in this guide and in its attaches are purely for information purposes, therefore, are subject to change without notice. At the time of publication the information is correct and reliable. However Paser can not be held responsible for any consequences resulting from errors, omissions or incongruence in this manual (for ex. according to missed audio configuration back-up of the vehicles). Paser reserves the right to improve / change the product or manual without obligation to notify users.

3. once the desired function is set to confirm the selection press and keep pressed the button till the led lights switch OFF, then release the button the led will light GREEN.



TECHNICAL CHARACTERISTICS	
POWER SUPPLY	10/16 VDC
SLEEP MODE COMSUMPTION	1 mA
WORKING MODE COMSUMPTION	1 A
MAX CURRENT OUTPUT	1.5 A

**SAAB 93
SAAB 95
TAHOE**
GM LAN CONNECTIONS
(SEEN FROM CABLE OUTPUT OF CONNECTORS)

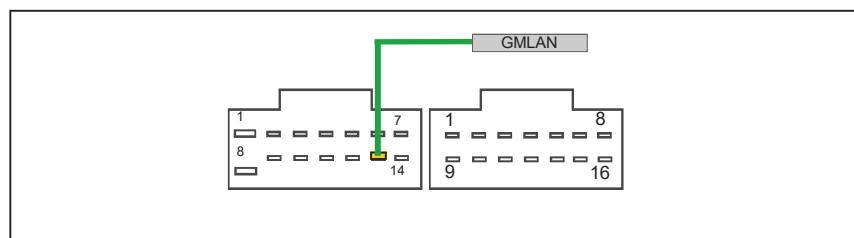


**OPEL ASTRA 2010 - INSIGNIA 2009 - MERIVA B
CHEVROLET CRUZE**
(SEEN FROM CABLE OUTPUT OF CONNECTORS)


**Can H
ASTRA/MERIVA B**

**Can H
INSIGNIA/CRUZE**


WIRES OUTPUT VIEW

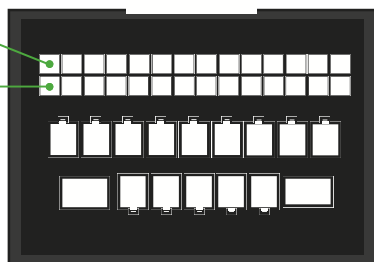

OPEL CORSA D 2008
(SEEN FROM CABLE OUTPUT OF CONNECTORS)

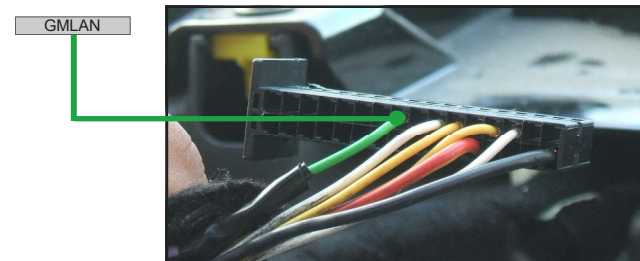

**CHEVROLET EXPRESS
BUICK LACROSSE**
(SEEN FROM FRONT)

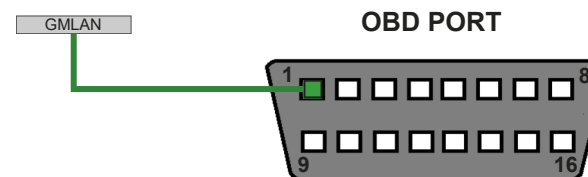

TROUBLESHOOTING

- The unit doesn't carry out any function and the LED is off.
- Verify the connections of the power supply.
- The correctly powered unit doesn't carry out any function and the LED is off.
- Verify the GMLAN connections.
- The unit is connected correctly and the RED LED flashes quickly.
- The unit hasn't been able to synchronize with the GMLAN, contact Paser.
- The unit is connected correctly and the RED LED flashes in an irregular way.
- Verify the GMLAN connections.
- The unit is connected correctly and the RED LED is lit up.
- The unit has carried out the synchronization with the GMLAN but hasn't been able to identify the vehicle, contact Paser.



WARNING!
**IF YOU NEED TO INSTAL THE SAME IN A NEW CAR (EVEN IF IN A SAME GROUP MODEL)
IT IS NECESSARY TO RESET THE MODULE.**

RESET:

1. WITH THE UNIT POWERED, PRESS AND KEEP PRESSED THE UNICAN BUTTON TILL THE LED SWITCH OFF.
2. WITH THE LED SWITCHED OFF RELEASE THE BUTTON, THE RESET IS DONE.