

UNICO DUAL HONDA CR-V 2013 - PIONEER

INSTALLATION MANUAL & USE rev 1.13

This following solution was developed specifically to install PIONEER radio into the HONDA CR-V and CIVIC (2013 version) vehicles.


INSTALLATION

The kit it's very easy to install due to the fact that is supplied with PLUG & PLAY harness. The operation to handle are:

- Remove the OEM radio.
- Connect the plug & play harness.
- Connect the Radio.

Connections diagram

1. PIONEER RADIO
2. "ISO" CONNECTOR TO PLUG TO THE RADIO
3. "OEM" CONNECTORS TO PLUG TO THE CAR
4. UNICO DUAL MODULE FOR STEERING WHEEL COMMANDS
5. REMOTE CONTROL OUTPUT
6. TO CONNECT FOR CARS WITH OEM AMPLIFIER

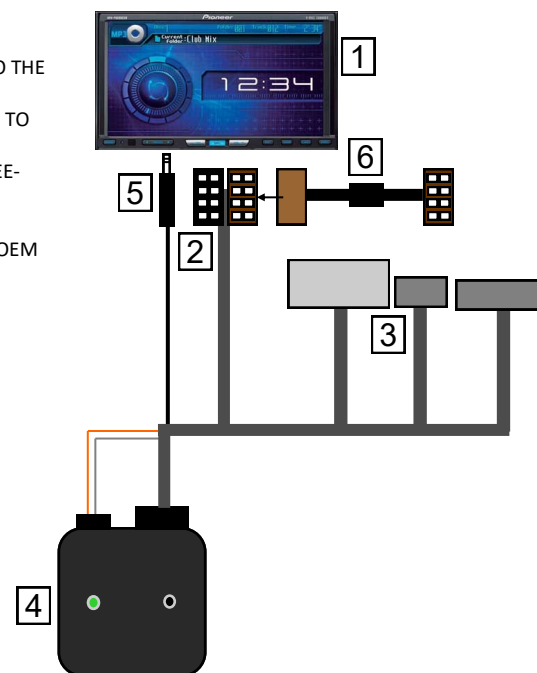

WARRANTY

THIS PRODUCT IS COVERED BY TWO-YEAR GUARANTEE FOR ANY MANUFACTURING TROUBLES. THE WARRANTY IS VALID IF ACCOMPANIED BY THE INVOICE OF PURCHASE


The information in this guide are purely for information purposes, therefore, are subject to change without notice.
At the time of publication the information is correct and reliable.
However Paser can not be held responsible for any consequences resulting from errors or omissions in this manual. Paser reserves the right to improve / change the product or manual without obligation to notify users.

INSTALLATION STEP BY STEP


It's very important to follow the steps described below.

2. Now connect the others 2 Grey connectors of Unico to the Grey connectors correspondent in the car.
The connectors in the car are located back the OEM radio.

ATTENTION CONNECT AT FIRST THE PLUG A, THEN TURN ON THE IGNITION OF THE CAR!

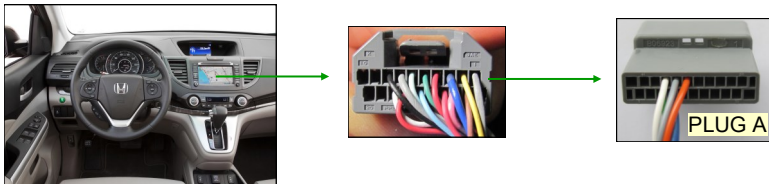


AFTER THE ABOVE OPERATION CONNECT THE POWER!

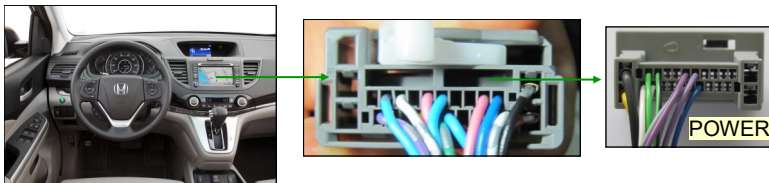

**THE LED WILL FLASH RED AND AFTER IT WILL BECOME FIXED GREEN.
THE MODULE HAS RECOGNIZED THE CAR.**

REMOTE PLUG CONNECTION


Now connect the ISO connector of the Unico cable to the radio.
Connect also the remote plug of Unico to the input back the radio.

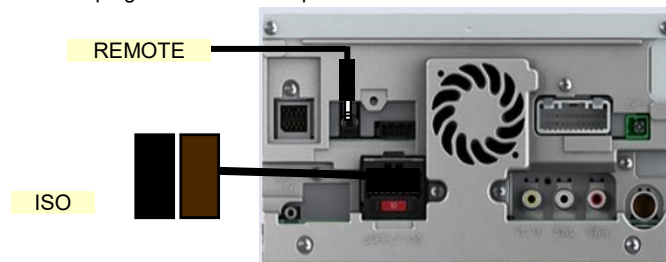

**ATTENTION!
IN CASE OF RADIO PIONEER PHONE BUTTONS
ARE NOT MANAGED!**

ACCESSORIES

If the vehicle is equipped of OEM amplifier, it's needed to add an audio attenuator, so connect the attenuator below in series to the speakers and the radio speakers output.

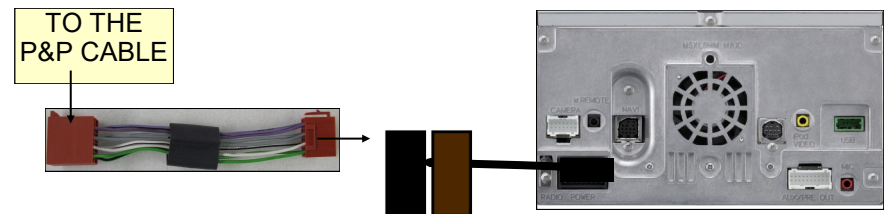

To recover the OEM USB plug please use the cable shown below



To recover the OEM SUBWOOFER plug please use the cable shown below




Now turn on the ignition , the radio will switch ON, once it is ON use the buttons on the SWC to control the radio:


- 1 Volume +
- 2 Volume —
- 3 SEEK +
- 4 SEEK —
- 5 SRC



TO RESET THE UNIT PLEASE DO AS BELOW DESCRIBED



PRESS AND KEEP THE
BUTTON PRESSED.



WHEN LED IS OFF,
RELEASE THE BUTTON.